



Revisions		Approved	Date
Description/Approved/Date		M.H.	03/17/00
		Checked	Date
		M.H.	03/17/00
		Drawn	Date
		K.R.E.	03/16/00
NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 50 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike			
Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1			
Dimensions are in Millimeters			

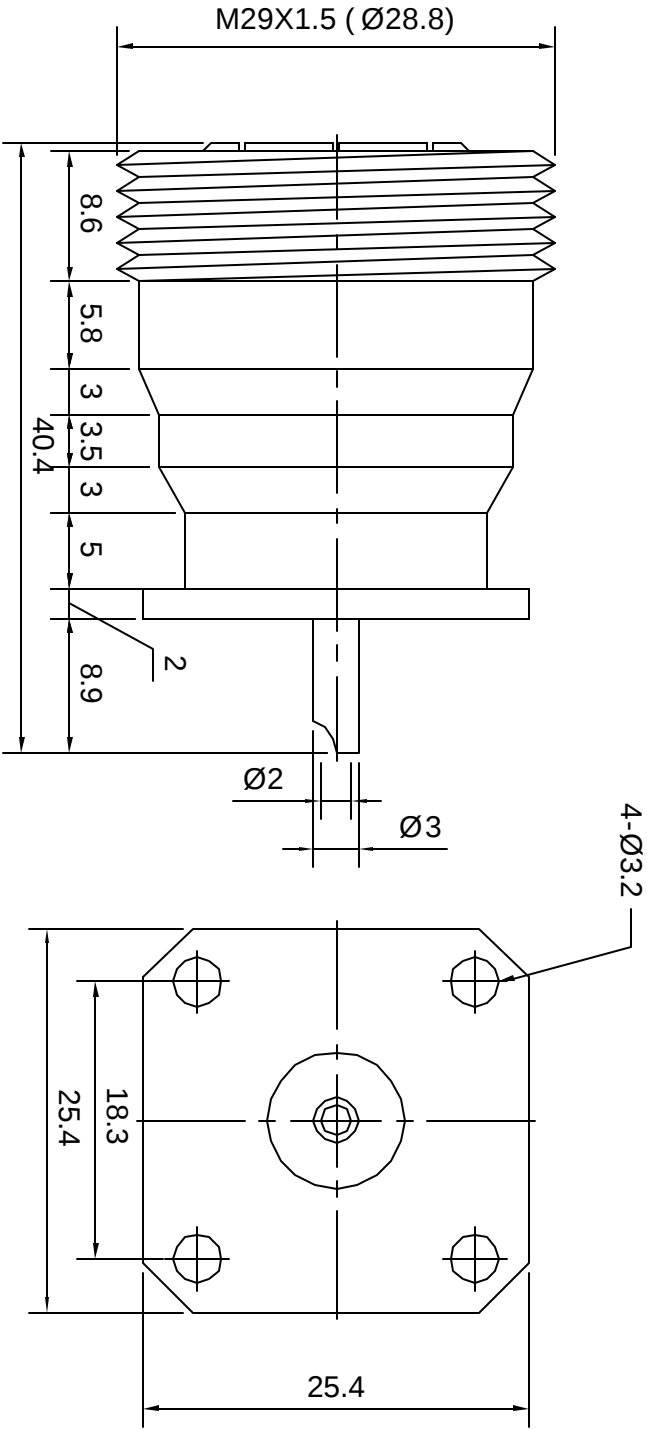

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Silver
Center Contact: Female	Brass, Note 1	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	--	--
Gasket	--	--
Hex Nut	--	--
Lock Washer	--	--



Lighthorse Technologies, Inc.
 4907 Morena Boulevard, #1411
 San Diego, California 92117
 Part Number:
LT-716SF42SVT

Description

7/16 Panel Mount Jack with Solder Cup

Scale 2:1

Drawing No. 716/716SF-42

File Name 716SF-42