
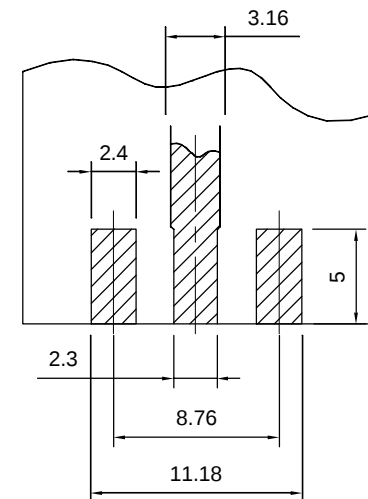

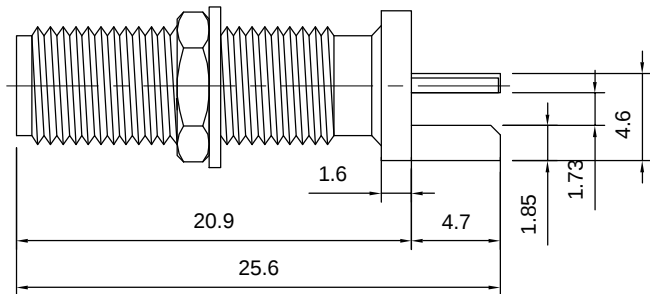


Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions	Approved	Date
	Description/Approved/Date	M.H.	5/7/99
		Checked	Date
		M.H.	5/7/99
NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750		Drawn	Date
		K.R.E.	5/6/99
	5. Per MIL-P-19468	9. Nickel pl. 100 min. over copper strike	
	6. Per ZZ-R-765	10. Per QQ-P-35	
	7. Per WW-T-799	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike	
	8. Gold pl. 50 min. over nickel pl. 50 min. over copper strike		

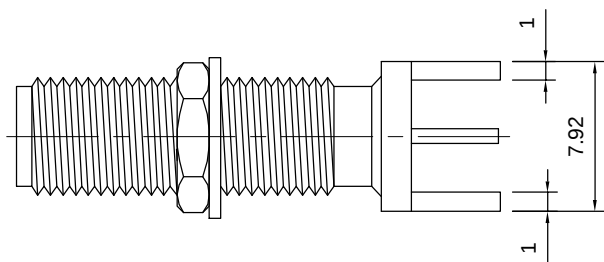

LANDING PAD DIMENSIONS

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 4907 Morena Boulevard, #1411 San Diego, California 92117 Part Number: LTI-SASF95LGT		
Connector Body	Brass, Note 1	Gold, Note 8			
Center Contact: Female	Beryllium Copper, Note 3	Gold, Note 11	Description SMA end launch jack, long version, rectangle flange		
Insulation	Teflon, Note 5	None			
Ferrule	--	--	Scale 3:1		
Gasket	--	--			
Hex Nut	Brass, Note 1	Same as body			
Lock Washer	Brass, Note 1	Same as body			
			Drawing No. SMA/SASF95L	File Name SASF95L	