



	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions	Approved	Date
		Description/Approved/Date	M.H.	
			Checked	Date
			M.H.	
		Drawn	Date	
		T.J.A.	08/16/06	
NOTES (plating thickness in micro-inches):		5. Per MIL-P-19468	9. Nickel pl. 100 min. over copper strike	
1. Per QQ-B-626		6. Per ZZ-R-765	10. Per QQ-P-35	
2. Per QQ-S-764		7. Per WW-T-799	11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	
3. Per QQ-C-530		8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike		
4. Per QQ-B-750				

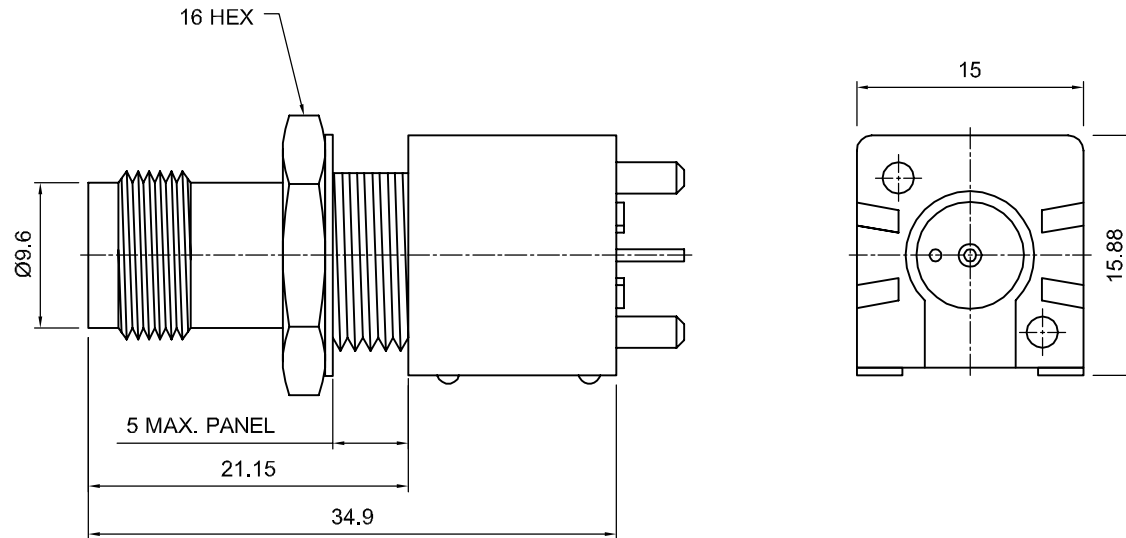

ITEM	MATERIAL	FINISH	Lighthouse Technologies, Inc.		
Connector Body	Brass, Note 1	Nickel, Note 9	 5640 Kearny Mesa Road, Suite N San Diego, California 92111	Part Number: LTI-7TSF54HNPW	
Center Contact: Female	BeCu, Note 3	Gold, Note 11			
Insulation	Polypropylene	None	Description		
Ferrule	--	--	75 Ohm vertical commercial TNC jack (high profile). Nickel plated		
Gasket	Silicone Rubber, Note 6	None	brass body (white plastic housed), Polypropylene dielectric.		
Hex Nut	Brass, Note 1	Same as body	Scale	Drawing No.	File Name
Lock Washer		Same as body	2:1		7TSF54HNPW