

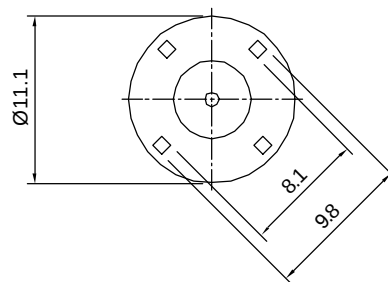


	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions Description/Approved/Date	Approved M.H.	Date 10/03/01
			Checked M.H.	Date 10/03/01
			Drawn K.R.E.	Date 10/03/01
		NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 3 min. over nickel pl. 50 min. over copper strike		

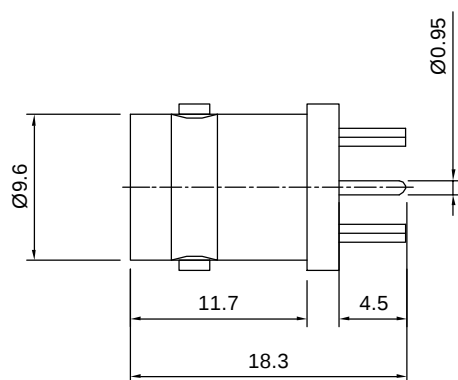

RECOMMENDED PCB
LAYOUT

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 4907 Morena Boulevard, #1411 San Diego, California 92117 Part Number: LTI-BSF54ZNT		
Connector Body	Brass, Note 1	Nickel, Note 9			
Center Contact: F	Brass, Note 1	Gold, Note 11			
Insulation	Teflon, Note 5	None			
Ferrule			Description BNC PCB Jack, Small Body (13.8 mm of PCB)		
Gasket					
Hex Nut			Scale 2:1		
Lock Washer					
			Drawing No. BSF54ZNT	File Name BSF54ZNT	